



# Certificate of Calibration No 117-00611

<i>Object</i>	<b>GPS rcvr type Septentrio PolaRx4TR PRO serial 3001318 Antenna type Aero AT-1675 serial 5105 Cable type Andrew Heliax FSJ1RN-50B (ID 3001318-5105)</b>
<i>Order</i>	Differential calibration of matched GPS receiver, antenna and cable against reference GPS link METAS WAB1 CH00 for P3 common-view time transfer.
<i>Applicant</i>	CERN, CH-1211, Genève 23, Switzerland
<i>Traceability</i>	The reported measurement values are traceable to national standards and thus to internationally supported realizations of the SI-units.
<i>Date of Calibration</i>	17.02.2012
<i>Marking</i>	Calibration label METAS 02.2012
CH-3003 Bern-Wabern, 02 March 2012	
For the Measurements	Sector Length, Optics and Time
Dr Laurent-Guy Bernier	Dr. Rudolf Thalmann, Head of sector



## Mutual recognition

This certificate is consistent with Calibration and Measurement Capabilities (CMCs) that are included in Appendix C of the Mutual Recognition Arrangement (MRA) drawn up by the International Committee for Weights and Measures. Under the MRA, all participating institutes recognize the validity of each other's calibration certificates and measurement reports for the quantities, ranges and measurement uncertainties specified in Appendix C (for details see [www.bipm.org](http://www.bipm.org)).



## Certificate of Calibration No 117-00611

### Extent of the Calibration

The matched GPS receiver, antenna and cable were differentially calibrated against the reference GPS link METAS WAB1 CH00 for the purpose of P3 common-view time transfer.

### Measurement Procedure

The BIPM differential calibration procedure was used (see Appendix).

### Measurement Conditions

Laboratory ambient temperature (DUT receiver):  $(21.0 \pm 1.0) ^\circ\text{C}$

Outdoors ambient temperature (DUT antenna): min  $-15 ^\circ\text{C}$  max  $-04 ^\circ\text{C}$

For the purpose of calibration GPS observations were collected from 2012-02-12 to 2012-02-13.

### Reference data DUT link

ID: CERB  
Receiver: type Septentrio PolaRx4TR PRO serial 3001318  
Antenna: type Aero AT-1675 serial 5105  
Antenna cable ID: CERN 3001318-5105 (delay 198.4 ns)  
Cable type: Andrew type Heliax FSJ1RN-50B (length 48 m)

REF clock UTC(CH)

Antenna phase coordinates	LAT(N)	46° 55' 25.3522"
	LON(E)	07° 27' 51.2971"
	ALT	612.628 m

### Reference data REF link

ID: WAB1 CH00  
Receiver: type Septentrio PolaRx2eTR serial 3289  
Antenna: type Ashtech 700936F serial CR14349  
Antenna cable ID: KA-KR#11 (delay 221.7 ns)  
Cable type: Andrew type Heliax FSJ1RN-50B (length 50 m)

REF clock UTC(CH)

Antenna phase coordinates	LAT(N)	46° 55' 25.5455"
	LON(E)	07° 27' 51.1217"
	ALT	612.555 m



## Certificate of Calibration No 117-00611

### Measurement result: delay of antenna cable

Counter: Stanford Research type SR620 serial 2895  
Method: Start: input A, internal ECL reference (1 kHz)  
Stop: input B, trigger -1.4 V, DC coupling, 50Ω impedance  
SR620 ECL reference signal connected to one cable connector  
Counter input B connected to other cable connector  
Measure time interval once with test cables only and once with DUT cable inserted.

$$CAB DLY = D_4 = (198.4 \pm 0.5) \text{ ns}$$

### Measurement result: internal delays

$$INT DLY P_1 = D_3(P_1) + D_5(P_1) = (54.8 \pm 2.0) \text{ ns}$$

$$INT DLY P_2 = D_3(P_2) + D_5(P_2) = (53.3 \pm 2.0) \text{ ns}$$

Note that the specified uncertainty covers only the zero-baseline differential calibration of the DUT link versus the REF link. The uncertainty is dominated by the calibration of  $D_i$  which is very sensitive to the trigger level because the rise time of the 1-PPS output is large.

The stated uncertainty does not include the calibration offset of the REF link versus UTC. An estimated of that offset is given in the Appendix.

The stated uncertainty does not include the uncompensated propagation effects that occur when the baseline is not zero. An estimate of that effect is given in the appendix.

### CGGTTS parameters of DUT link

The CGGTTS parameters of Figure 1 applicable to the DUT link are based on the following parameters.

$$D_i = 145.6 \text{ ns}$$

$$D_2 = D_i = 145.6 \text{ ns}$$

$$D_1 = 25.3 \text{ ns}$$

$$REF DLY = D_1 + D_2 = 170.9 \text{ ns}$$

Note that  $D_i$  was calibrated according to the procedure described in the Appendix.



## Certificate of Calibration No 117-00611

Note that the delay  $D_1$  depends on a calibration of the 1-PPS signal from the reference clock.

A negative/positive value of the REF DLY means that the physical 1-PPS signal from the reference UTC(CH) distribution amplifier which is connected to the 1-PPS input of the DUT leads/lags the UTC(CH) time scale.

Parameter Conversion Exit

CGGTTS Header Info

REV DATE = 2010-02-10  
RCVR = PolaRx4TR SN 3001318  
CH = 12 (GPS)  
LAB = CERN  
X = 4327322.453  
Y = 566956.118  
Z = 4636423.930  
FRAME = ITRF88  
COMMENTS = cal 2012-02-10-B CERB  
INT DLY (GPS P1) = 54.8  
INT DLY (GPS P2) = 53.3  
CAB DLY = 198.4  
REF DLY = 170.9  
REF = UTC(CH)

Parameter file name : 2012-02-10-B CERB.par

Rinex Info

Observation File Name : CERB  
Observation File Directory : P:\blg\tempo RINEX  
 YYDDYY subdirectory structure

Navigation File Name : CERB  
Navigation File Directory : P:\blg\tempo RINEX  
 YYDDYY subdirectory structure

Other Info

Laboratory Code = CE  
Receiver Code = RB  
GPS time - UTC = 15  
 C1-P1 biases (file name must be "biasC1P1.dat")  
Browse C:\

Figure 1 CGGTTS parameters of DUT link

## Uncertainty of Measurement

The reported uncertainty of measurement is stated as the combined standard uncertainty multiplied by a coverage factor  $k = 2$ . The measured value ( $y$ ) and the associated expanded uncertainty ( $U$ ) represent the interval ( $y \pm U$ ) which contains the value of the measured quantity with a probability of approximately 95 %. The uncertainty was estimated following the guidelines of the ISO (GUM:1995).

The measurement uncertainty contains contributions originating from the measurement standard, from the calibration method, from the environmental conditions and from the object being calibrated. The long-term characteristic of the object being calibrated is not included.



## Certificate of Calibration No 117-00611

### Appendix: Definitions and Methods

#### 1.1 Introduction

The differential calibration was performed according to the standard procedure that the BIPM uses for the differential calibration of the P3 GPS receivers used in National Metrology Institutes (NMI) for the generation of TAI (Temps Atomique International) [1], [2], [3].

However, when the BIPM organises differential calibration trips, the travelling reference receiver provided by the BIPM is absolutely calibrated using a satellite simulator. The P3 GPS receivers of the NMI's are then differentially calibrated against the absolutely calibrated reference receiver.

On the other hand, the present calibration is differential to the second degree. The DUT (Device Under test) GPS receiver was calibrated against the reference WAB1 CH00 P3 receiver which itself was differentially calibrated by the BIPM in 2009 against an absolutely calibrated reference receiver. Hence the absolute DUT calibration uncertainty cumulates the uncertainty of the internal delay parameters of the BIPM reference receiver and of the METAS reference receiver.

#### 1.2 Definitions of internal delays

There is no need to calibrate the internal delays of a geodetic receiver used for standard geodetic applications. In normal operation the pseudo-range and the carrier phase measurements are collected and the observation data are processed and solved for the position and local time as defined at the location of the phase reference plane of the antenna.

This is why the headers of RINEX observation and navigation data files do not contain any parameter related to the internal delays. RINEX is the standard file format used by the international geodetic community for geodetic surveying [6].

On the other hand when the RINEX data is translated into CGGTTS data [4] [5] for the purpose of GPS P3 common-view time transfer, a number of calibrated delay parameters are used to translate the time comparison node from the antenna reference plane down to a conventional reference location which allows absolute time comparison between the local reference clock and the satellite reference clock.

CGGTTS delays /ns
INT DLY P1
INT DLY P2
CAB DLY
REF DLY

Table 1 CGGTTS Calibrated Delays

The CGGTTS (CCTF Group on GNSS Time Transfer Standards) is the standard data file format used by the BIPM and by the NMI's for Common-View time transfer. CCTF is the Consultative Committee for Time and Frequency.

Figure 2 below is an example of CGGTTS data file generated with the DUT geodetic GPS receiver. Table 1 lists the calibrated delays that appear in the CGGTTS header.



## Certificate of Calibration No 117-00611

```

GZCERB55.972 - Bloc-notes
Fichier Edition Format Affichage ?
CGGTTS GPS/GLONASS DATA FORMAT VERSION = 02
REV DATE = 2010-02-10
RCVR = Po1arX4TR SN 3001318          R2CGGTTS v4.3
CH = 12 (GPS)
IMS = Po1arX4TR SN 3001318
LAB = CERN
X = +4327322.45 m (GPS)
Y = +566956.12 m (GPS)
Z = +4636423.93 m (GPS)
FRAME = ITRF88
COMMENTS = ca1 2012-02-10-B CERB
INT DLY = 54.8 ns (GPS P1), 53.3 ns (GPS P2)
CAB DLY = 198.4 ns (GPS)
REF DLY = 170.9 ns
REF = UTC(CH)
CKSUM = 73

PRN CL MJD STTIME TRKL ELV AZTH REFSV SRSV REFGPS SRGPS DSG IOE MDTR SMDT MDIO SMDI MSIO SMSI ISG FR HC FRC CK
      hhmms s .1dg .1dg .1ns .1ps/s .1ns .1ps/s .1ns .1ns .1ps/s .1ns .1ps/s .1ns .1ps/s .1ns
25 FF 55972 000200 780 788 3600 -316395 -10 109 -8 6 57 77 +0 58 +7 58 7 4 0 0 L3P 86
14 FF 55972 000200 780 329 2522 -1938670 -2 146 +12 15 18 139 +17 73 +9 73 9 10 0 0 L3P CE
12 FF 55972 000200 780 485 789 -524742 -27 133 -6 7 57 101 +10 73 +3 73 3 4 0 0 L3P 83
4 FF 55972 000200 780 137 395 -942263 -106 112 +9 32 60 315 +89 76 -22 76 -22 24 0 0 L3P DD
2 FF 55972 000200 780 331 711 -3789929 -9 136 +7 15 23 138 +3 71 -20 71 -20 12 0 0 L3P AE
9 FF 55972 000200 780 151 1460 -1385551 -36 136 -11 22 105 289 +127 103 +24 103 24 15 0 0 L3P 22
31 FF 55972 000200 780 319 3104 -2082268 -55 105 -9 11 30 143 -27 73 +13 73 13 8 0 0 L3P CF
29 FF 55972 000200 780 557 2131 -2847370 -38 139 -2 5 21 92 -9 62 -5 62 -5 4 0 0 L3P 9C
25 FF 55972 001800 780 777 382 -316399 -5 107 -3 4 57 78 +1 59 +1 59 1 3 0 0 L3P 65
14 FF 55972 001800 780 281 2454 -1938683 -31 145 -17 20 18 161 +28 86 +18 86 18 14 0 0 L3P 17
12 FF 55972 001800 780 426 831 -524769 -34 126 -12 9 57 112 +13 80 +22 80 22 5 0 0 L3P B7
2 FF 55972 001800 780 318 633 -3789946 +1 134 +17 16 23 144 +8 64 -22 64 -22 13 0 0 L3P CD
31 FF 55972 001800 780 383 3085 -2082302 -46 116 +1 9 30 122 -18 67 -3 67 -3 7 0 0 L3P B2
29 FF 55972 001800 780 635 2164 -2847401 -39 143 -3 5 21 85 -6 55 -1 55 -1 3 0 0 L3P 98
24 FF 55972 001800 780 161 2824 +2549951 +1 139 +3 19 118 271 -95 190 -18 190 -18 12 0 0 L3P 2E
25 FF 55972 003400 780 737 647 -316406 -10 103 -7 5 57 79 +2 63 +11 63 11 3 0 0 L3P 7F
14 FF 55972 003400 780 227 2396 -1938701 -73 140 -59 25 18 196 +47 94 +40 94 40 20 0 0 L3P 17
12 FF 55972 003400 780 366 908 -524792 -38 125 -16 10 57 127 +18 93 +28 93 28 7 0 0 L3P E7
2 FF 55972 003400 780 292 562 -3789961 -18 134 -2 15 23 155 +16 62 -5 62 -5 10 0 0 L3P BB
31 FF 55972 003400 780 446 3048 -2082346 -38 116 +9 7 30 108 -12 68 -6 68 -6 4 0 0 L3P C1
29 FF 55972 003400 780 714 2204 -2847439 -23 140 +14 5 21 80 -4 55 -14 55 -14 3 0 0 L3P C1

```

Figure 2 Example of CGGTTS Data File Including Header

$INT DLY P_1$  and  $INT DLY P_2$  are the internal delays of the GPS geodetic receiver. There are two internal delay parameters because the  $P_1$  and  $P_2$  observations are based on two different carrier frequencies, so the propagation delay might be different.

$CAB DLY$  is the delay of the coaxial cable that connects the antenna to the receiver.

$REF DLY$  is the delay between the local REF clock 1-PPS signal and the reference time difference node inside the geodetic receiver.

The delay parameters can be defined by referring to the timing diagram of Figure 3



## Certificate of Calibration No 117-00611

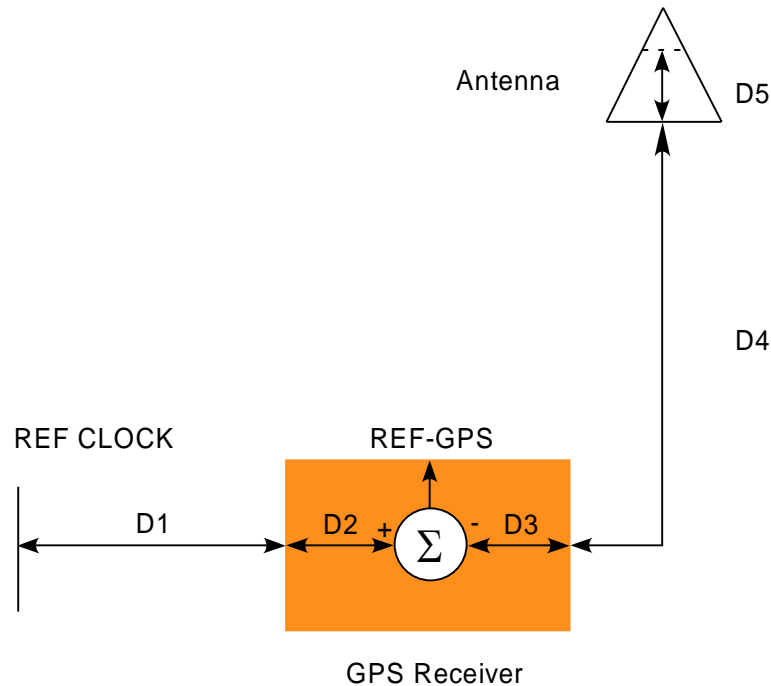


Figure 3 Timing Diagram

The *REF DLY* is defined as

$$REF\ DLY = D_1 + D_2 \quad (1)$$

where  $D_1$  is the external part of the REF DLY, i.e. the delay between the laboratory reference node of the REF clock and the 1-PPS input connector of the GPS receiver.

$D_2$  is the internal part of the REF DLY, In the particular case of the Septentrio PolaRx4TR PRO receiver we have

$$D_2 = D_i + 0.0\text{ns} \quad (2)$$

where

$D_i$  is the insertion delay of the Septentrio PolaRx4TR receiver, i.e. the delay between the 1-PPS input signal and the 1-PPS output signal.

Note that the Septentrio manual [7] page 8 specifies that the 1-PPS output pulse can be synchronized to the *measurement latching event*, i.e. to what we call here the time comparison node, by means of the command `setPPSPParameters, sec1, Low2High, 0, RxClock <cr>`.

Once synchronization is achieved, the 1-PPS output pulse is synchronous with the *measurement latching event*. Hence the constant 0.0 ns in equation (2).



## Certificate of Calibration No 117-00611

The BIPM procedure [1] specifies a DC trigger level of +0.5 V with 50  $\Omega$  matched impedance loading for the measurement the 1-PPS input to 1-PPS output delay  $D_i$ .

The Septentrio manual [7] specifies that  $D_2$  is a constant that depends on the phase relationship between the 10 MHz signal and the 1-PPS input.  $D_2$  can vary between 130.3 ns and 150.3 ns. Hence it is necessary to calibrate this delay.

The Septentrio manual [7] specifies that the amplitude of the 10 MHz reference input p-p amplitude in a 50  $\Omega$  matched impedance must be in a range of [0.5 V, 2.0 V] for correct internal timing of the PolRx4TR receiver.

Note that the zero crossings of the 10 MHz REF input must have a constant synchronization delay versus the 1-PPS REF input signal (i.e. the 1-PPS and the 10 MHz must be generated from the same frequency standard). The value of  $D_2$  actually depends on the value of the synchronization delay. Hence  $D_2$  must be calibrated only after an unspecified but constant synchronization delay has been achieved.

Note, finally, that the internal timing of the PolRx4TR is based exclusively on the 10 MHz REF signal. After a hardware reset, the internal clock is calibrated only once versus the 1-PPS REF signal. Hence, after initialization, the 1-PPS REF signal becomes irrelevant and can even be disconnected without any impact on the internal timing. As a consequence, a hardware reset and a calibration of  $D_i$  are compulsory after each modification of the system configuration that might affect the synchronization delay of the REF 10 MHz versus the REF 1-PPS.

Regarding the antenna cable delay, we have

$$CAB DLY = D_4 \quad (3)$$

which means that  $CAB DLY$  covers exclusively the delay of the coaxial cable that connects the antenna to the receiver. The antenna cable can be replaced without losing the calibration of the matched set of receiver and antenna, provided that the parameter  $CAB DLY$  is set to the actual calibrated value of the cable delay.

The  $INT DLY P_1$  and  $INT DLY P_2$  parameters reflect the internal delays of the DUT receiver and of the DUT antenna at the  $P_1$  and  $P_2$  carrier frequencies.

$$INT DLY P_1 = D_3(P_1) + D_5(P_1) \quad (4)$$

$$INT DLY P_2 = D_3(P_2) + D_5(P_2) \quad (5)$$

In principle, it would be possible, but more difficult, to calibrate independently the receiver internal delay  $D_3$  and the antenna internal delay  $D_5$ . This would allow to match and mix different receivers and antennas without losing the calibration. However in the present calibration we chose to calibrate a matched set of DUT receiver and antenna.





## Certificate of Calibration No 117-00611

In the CGGTTS output file, the result *REFGPS* is the measured time difference

$$REFGPS = X(CLK) - X(GST) \quad (6)$$

in units of 0.1 ns where  $X(CLK)$  is the time of the local REF clock and  $X(GST)$  is the estimation of GPS system time broadcasted by the GPS satellite *PRN* for a given track of duration *TRKL* started on Modified Julian Day *MJD* at epoch *STTIME*.

In the case of a P3 CGGTTS file [4] the *REFGPS* time differences are based on the *ionosphere-free* code  $P_3$  which is actually a linear combination of the  $P_1$  and  $P_2$  codes.

Since the propagation delay through the ionosphere is different at the  $P_1$  and  $P_2$  carrier frequencies, due to the dispersion of the ionosphere, it is possible to construct a linear combination  $P_3$  that compensates for the ionospheric delay variations, hence the name *ionosphere-free* code.

In order to calibrate independently the *INT DLY*  $P_1$  and *INT DLY*  $P_2$  internal delay parameters, it is necessary to first reconstruct the  $P_1$  and  $P_2$  comparisons from the *ionosphere-free*  $P_3$  observations. This is done as follows.

$$REFGPS(P_1) = REFGPS(P_3) + MSIO \quad (7)$$

$$REFGPS(P_2) = REFGPS(P_3) + 0.647 \times MSIO \quad (8)$$

Equations (7) and (8) are actually the inverse function of the linear combination that was used by the RINEX to CGGTTS translation software to build the  $P_3$  *ionosphere-free* observations from the  $P_1$  and  $P_2$  observations.

The field *MSIO* in the P3 CGGTTS format [4] contains the difference between the  $P_1$  and the  $P_3$  observations for each satellite and for each track.

### 1.3 Zero baseline differential calibration procedure

To calibrate the DUT P3 link (matched set of receiver, antenna and antenna cable) against a REF P3 link, it is necessary to setup a zero-base line P3 common-view experiment.

The first step is to calibrate the antenna cable delay  $D_4$ .

Then the DUT link is connected to the 1-PPS and to the 10 MHz signals of a REF clock that is the same or that can be related to the REF clock that drives the REF link. The components  $D_1$  and  $D_2$  of *REF DLY* are calibrated.



## Certificate of Calibration No 117-00611

In a zero baseline P3 common-view experiment the observations from the P3 CGGTTS files generated by the DUT and REF link are processed in a common-view mode, i.e. the differences are taken track by track and satellite by satellite,

$$REFGPS(DUT) - REFGPS(REF) = [X(CLK_{DUT}) - X(GST)] - [X(CLK_{REF}) - X(GST)] \quad (9)$$

and since the broadcasted value of the estimated GPS system time  $X(GST)$  is a common term, the system time cancels out yielding the difference between the local clocks.

$$REFGPS(DUT) - REFGPS(REF) = X(CLK_{DUT}) - X(CLK_{REF}) \quad (10)$$

If the two links refer to the same local clock, then we should have

$$REFGPS(DUT) - REFGPS(REF) = X(CLK_{DUT}) - X(CLK_{REF}) = 0 \quad (11)$$

provided that the delay parameters in the P3 CGGTTS file header are correctly calibrated.

Indeed we have for each link and for each carrier frequency

$$REFGPS_{CGGTTS} = REFGPS_{raw} - CAB DLY - INT DLY + REF DLY, \quad (12)$$

where  $REFGPS_{raw}$  represents the raw  $P_1$  or  $P_2$  observations made by the uncalibrated receiver while  $REFGPS_{CGGTTS}$  represents the calibrated observations as found in the P3 CGGTTS output files after translation by the RINEX to CGGTTS translation software.

Hence, once  $CAB DLY$  and  $REF DLY$  are independently calibrated, the zero baseline P3 common-view experiment is used to determine the  $INT DLY_{P_1}$  and  $INT DLY_{P_2}$  internal delay parameters of the DUT link.

As a matter of fact, if the DUT link and the REF link are referred to the same physical clock and if the internal delay parameters of the REF link are assumed to be correctly calibrated, then adjusting the internal delay parameters of the DUT link to cancel equation (11) will yield the correct internal delay parameters for the DUT link. This is what the differential calibration is all about.

In the particular case where the DUT link and the REF link and not referred to the same physical clock, then it is necessary to refer the physical clocks to each other via the UTC(CH) local time scale.

If we define

$$CLK OFFSET = [CLK_{DUT} - UTC(CH)] - [CLK_{REF} - UTC(CH)], \quad (13)$$

then (11) becomes

$$[X(CLK_{DUT}) - X(CLK_{REF})] - CLK OFFSET = 0. \quad (14)$$

As a matter of fact, in (14)  $[X(CLK_{DUT}) - X(CLK_{REF})]$  is the clock difference as measured via



## Certificate of Calibration No 117-00611

the zero baseline P3 common-view experiment, while  $CLK\ OFFSET$  is the actual clock difference independently measured against UTC(CH). If the DUT link is properly calibrated, then the double difference (14) should be zero.

Note, finally, that the  $INT\ DLY\ P_1$  and  $INT\ DLY\ P_2$  internal delay parameters are actually adjusted in two steps.

In the first step the  $P_1$  and  $P_2$  observations are reconstructed from the *ionosphere-free*  $P_3$  observations using (7) and (8). During that first step, the constants  $INT\ DLY\ P_1$  and  $INT\ DLY\ P_2$  are independently adjusted to yields the same offset in the  $P_1$  based version of (14) and in the  $P_2$  based version of (14) which is not necessarily zero. This first step determines the correct *difference* between the delays  $INT\ DLY\ P_1$  and  $INT\ DLY\ P_2$ .

Then, in a second step, the  $INT\ DLY\ P_1$  and  $INT\ DLY\ P_2$  internal delay parameters are adjusted *together*, maintaining the correct difference determined in the previous step, to adjust the  $P_3$  based offset (14) to zero.

### 1.4 Discussion of uncertainties

The differential calibration is performed by means of a zero baseline P3 common-view experiment. The zero baseline statement means that the antennas of the DUT and of the REF links are located a few meters apart, which implies that the propagation paths from a GPS satellite to the antennas are identical. Hence hypothetical systematic errors associated with propagation are common mode and cancel out in the measurement.

On the other hand, in an actual P3 common-view time transfer experiment, the propagation paths are not identical and the larger the baseline, the larger the uncompensated propagation effects.

Another source of uncertainty is the temperature dependence of the delays. Both the geodetic receiver, the antenna cable and the antenna itself, which contains active electronics, are temperature dependent. Hence the calibrated delays may change if the operating temperatures are very different from the calibration temperature. With the DUT link we have observed environmental changes of the order of  $\pm 1$  ns. The temperature dependence of the DUT link was not calibrated.

According to BIPM [2] the absolute uncertainty (i.e. including both the uncertainty of the differential calibration of the DUT receiver and the uncertainty on the absolute delays of the REF receiver) of a calibrated P3 link based on an Ashtech Z12-T receiver is  $\pm 3$  ns.

The uncertainty that BIPM specifies in the monthly publication Circular T for calibrated P3 TAI links operated in NMI's is  $\pm 5$  ns. This uncertainty includes the uncompensated propagation effects.



## Certificate of Calibration No 117-00611

### 1.5 Reference documents

- [1] *Calibration of Geodetic-Type Receivers Using the Traveling BIPM PolaRx2 Receiver, Guidelines and Operational Procedures*, BIPM procedure calibgeo-V41.pdf.
- [2] *Estimation of the Values and Uncertainties of the BIPM Z12-T Receiver and Antenna delays, for Use in Differential Calibration Exercises*, by G. Petit, BIPM Time Section Technical Memorandum TM.116, July 2002.
- [3] *Progresses in the Calibration of Geodetic Like GPS Receivers for Accurate Time Comparisons*, by G. Petit, Z. Jiang, P. Moussay, J. White, E. Powers, G. Dudle, P. Urich, in Proceedings 15<sup>th</sup> EFTF, Neuchâtel, Switzerland, 2001.
- [4] *Proposal to Use Geodetic-Type Receivers for Time Transfer Using the CGGTTS Format*, by P. Defraigne, G. Petit, BIPM Time Section Technical Memorandum TM.110, November 2001.
- [5] *Time Transfer to TAI Using Geodetic Receivers*, by P. Defraigne, C. Bruyninx, J. Clarke, J. Ray, K. Senior, Proceedings 15<sup>th</sup> EFTF, Neuchâtel, Switzerland 2001, pp. 164-166.
- [6] *RINEX, the Receiver Independent Exchange Format*, version 3.00, by Werner Gurtner, Astronomical Institute, University of Bern, and Lou Estey, UNAVCO, Boulder CO, November 2007.
- [7] *Septentrio PolaRx4 Product Family Hardware Manual v1.4.08*.